

List of errata found in *Using R for Introductory Statistics* December 5, 2007

page 6, bottom line Should read “although for the most part knowledge of these functions is not essential...”

page 19, line 17 Should read “if y is too long...”

page 19, line -9 The greater than or equal operator is wrong. It should be typed `>=` and not `=>`.

page 26, line 3 The data set `Sitka` is part of the `MASS` package. This package needs to be loaded, such as it is on page 24, to have the data set loaded into the workspace.

page 30, line 8 The variable names is `time`, not “times” in the `nym.2002` dataset

page 34, line 1 If you enter `scan()` in the command line the console will appear to stop. It is waiting for a terminating blank line.

page 36, line 5 The data needs 4 terms, not 3, to match the size of the names. Try:

```
> our.data = c(1,2,2,5); names(our.data) = 1:4
```

page 36, second to last line The colors were specified with

```
col(gray(.7, .85, .95))
```

(A decimal point is used, not the comma with `.7`.) To be clear, we can produce the pie chart with

```
> sales <- c(John=45,Jack=44,Suzy=46)
> col = gray(c(.7,.85,.9))
> pie(sales, main="sales", col=col)
```

page 60, line -4 The data set to detach is `faithful`:

```
> detach(faithful)
```

page 71, line 18 The example showing how the labels for the seat belt data can be made inadvertently switches the order of “buckled” and “unbuckled.” The correct line should be

```
> tmp = c("buckled","unbuckled") # less typing
```

to match lines 8 and 9 on the same page. Unfortunately, this error propagates to the 4 subsequent displays of this data— the two on page 71, the one on page 72, and the one on page 73. This also effects the Figure 3.1 on page 75 which is better presented with these commands (Figure 1):

```
> x = matrix(c(56, 2, 8, 16), nrow = 2)
> tmp = c("buckled", "unbuckled")
> rownames(x) = tmp
> colnames(x) = tmp
> barplot(x, xlab = "Parent", beside = FALSE)

> barplot(x, xlab = "Parent", beside = TRUE)
```

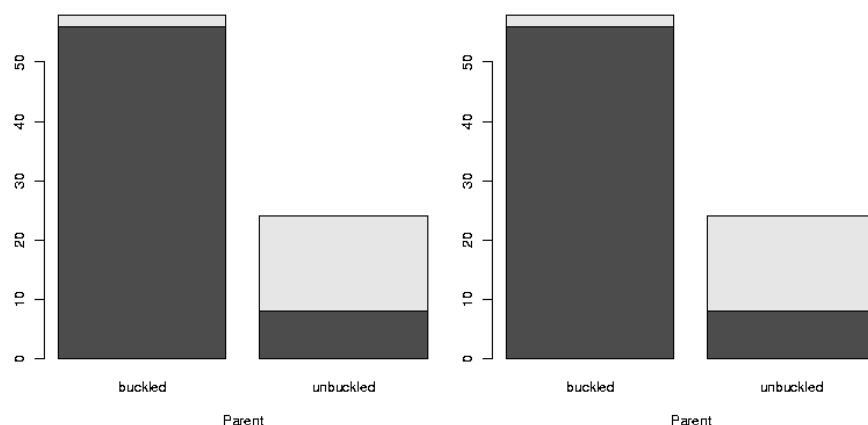


Figure 1: (From Figure 3.1 page 75) Segmented and side-by-side barplots showing distribution ...

page 83, lines 12-21 The `homedata` dataset used in the book is not the same as that in the `UsingR` package version 0.1-8. This should be fixed by version 0.1-9 of the package, but for reference with the modified data the results would change in the display on page 83 to:

```
> attach(homedata)
> summary(y1970)
  Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
    0  57000  68900  70820  80500 297200
> summary(y2000)
  Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
 7400 161400 251700 268400 335600 1183000
> summary(y2000/y1970)
  Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
0.740  2.878  3.579    Inf  4.310    Inf
> detach(homedata)
```

Seeing as values of 0 appear in the y1970 data, we can replace those values and compute:

```
> hd = subset(homedata, subset=y1970 > 0)
> attach(hd)
> summary(y1970)
  Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
  9200  57000  68900   70830  80500 297200
> summary(y2000)
  Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
  7400 161400 251600 268300 335400 1183000
> summary(y2000/y1970)
  Min. 1st Qu.  Median    Mean 3rd Qu.    Max.
 0.740  2.878  3.579  3.641  4.310  9.314
> detach(hd)
```

page 87, line -6 The first formula for the Pearson correlation is missing a parenthesis in the denominator. It should be $(x_i - \bar{x})^2$, not $x_i - \bar{x})^2$.

Page 108, line 16 The boxplot command should have UA in place of a US. Try

```
boxplot(AA,CO, DL,HP,NW,TW,UA,US)
```

Of course, it is more efficient to just use data frame notation for these things:

```
boxplot(ewr[,3:10])
```

Page 112, lines 12-16 The following code snippet is incorrect.

```
> library(MASS)                # loads Cars93 data set
> mpg = with(Cars93,cut(MPG.city,c(0,17,25,55)))
> names(mpg) = c("bad","decent","excellent")
> price = with(Cars93,cut(Price,c(0,10,20,62)))
> names(price) = c("cheap","mid-priced","expensive")
```

It should have names replaced with levels

```
> library(MASS)                # loads Cars93 data set
> mpg = with(Cars93,cut(MPG.city,c(0,17,25,55)))
> levels(mpg) = c("bad","decent","excellent")
> price = with(Cars93,cut(Price,c(0,10,20,62)))
> levels(price) = c("cheap","mid-priced","expensive")
```

The reason being that the variables `mpg` and `price` are factors and we wish to rename their internal names, or levels. Trying to use `names` will not work as expected as there are 93 things to name in `mpg`, but only 3 names given in the assignment statement. As such the first three values will be names, the remaining 90 will have a `<NA>` value.

Page 123, line 8 The names of the data frame at this point are `a b V3 V4` and not `a b c d`. The command `names(df) <- letters[1:4]` is one way to assign those names.

Page 123 The data frame example fails with newer versions of R as the line

```
> df[1:2,3:4] = cbind(11:12,13:14)
```

Dropping the `i` index will work:

```
> df[,3:4] = cbind(11:12,13:14)
```

Page 130, line -1 The correct variable name containing the *amounts* given is called `amounts` and not “award.” The proper command should have been:

```
tmp = split(amount, ID)
```

Page 132 The command to set the background color for lattice graphics is now

```
lattice.options(default.theme = "col.whitebg")
```

Page 134, line 11 The panel function is called `plot.regression`, not `panel.regression`. Hence when referring to the function on line 11, the argument should read

```
+ panel = plot.regression)      # a new panel function
```

page 135, line -9 The variable name `Pulse` has spurious parentheses.

page 147, line 33,35 The value 6,800 should be replaced with 6,200 in lines 33 and 35 to match the hypothetical 6,200 in the text.

page 163, line 4 The formula is for the standard deviation, not the variance. (The variance would simply be $np(1-p)$.)

Page 186, line 5 The position of z^* and α is mixed up in the formula display. It should read

$$\alpha/2 = P(Z \leq -z^*), \text{ or, similarly } 1 - \alpha/2 = P(Z \leq z^*).$$

Page 203, line -6 In Example 7.9, the boxplots are labeled incorrectly. This occurs in the `boxplot()` call. It should read

```
boxplot(list(placebo=x, drug=y), col="gray") #compare spreads
```

page 209, line 3 The name `Wilcoxon` is incorrectly spelled.

page 220, line -8 The alternative hypothesis should read

As $H_A : p > 0.113$, we will use...

instead of the value $p > 0.11$.

page 231, `wilcox.test(x, ...)` is incorrectly written as `wilcox.test(...`

page 250, line -9 The R code does not match the example. It should read:

```
choose(100,35) * choose(65,40) * .35^35 * .35^40 * .30^25
```

page 260, third paragraph The explanation for the number of degrees of freedom in the chi-squared test of independence is not right. The correct reasoning is to subtract the number of estimated parameters, $n_r - 1 + n_c - 1$ from the usual degrees of freedom for the chi-squared statistic $n_r \cdot n_c - 1$. Algebraically we have

$$n_r \cdot n_c - 1 - (n_r - 1 + n_c - 1) = n_r \cdot n_c - n_r - n_c + 1 = (n_r - 1)(n_c - 1).$$

page 275, problem 9.20 In the answers, the `rivers` data set produced a warning when fit with `fitdistr`. As of R 2.2.1 this is no longer the case. Additionally, the estimated parameters are quite different. This isn't necessarily better as a plot will show. For this problem the default estimates for the optimizer are not great, leading the algorithm to get trapped.

Page 292, line -9 The line `coef(res)[1]` should use the variable `res.mhr` instead. This same error appears in several other places including the next line (page 292, line -8), page 293 line 6, page 294 line 16, page 295 line 2, page 195 line -10, and page 2967 line -9.

page 292, subsection 10.2.3 The `res` variable refers to the `res.mhr` variable previously defined on page 282. The command

```
> res <- res.mhr
```

may be used to replace the version or `res`.

page 335, line -12 The sentence should read δ_j is the mean for the j th level of x_2 .

help pages, father.son Data set was used by Pearson, not Galton as indicated.

help pages, central.park The variable `WX` is incorrectly documented.

Special thanks to Steven Banville, Joel Daniels, Dr. Raul de la Fuente-Fernandez, Stephen Haptonstahl, Mary Karlins, Jenifer Larson-Hall, Brian O'Gorman, David Park, Seong Hyun Park, Stuart Robinson, Carl Simon, Dr. Peter Thorhauer, Camille Vanderhoeft, and Etienne Voutaz for pointing out errors.

If you find additional errata please send them to verzani@math.csi.cuny.edu. Thanks.